

4




3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2012-10-23

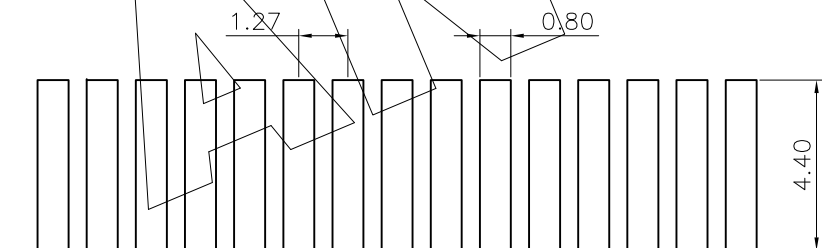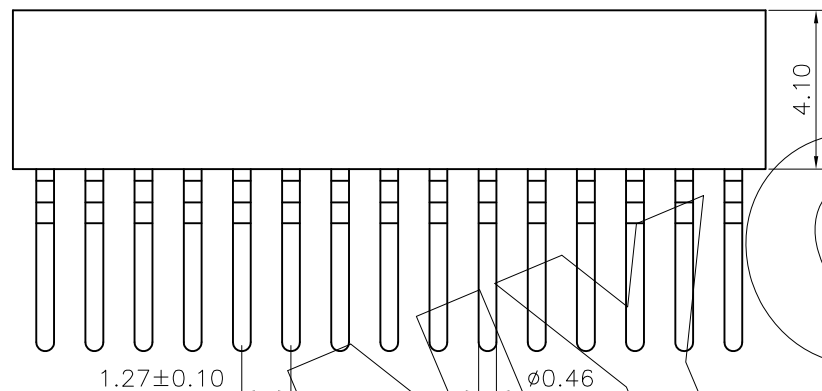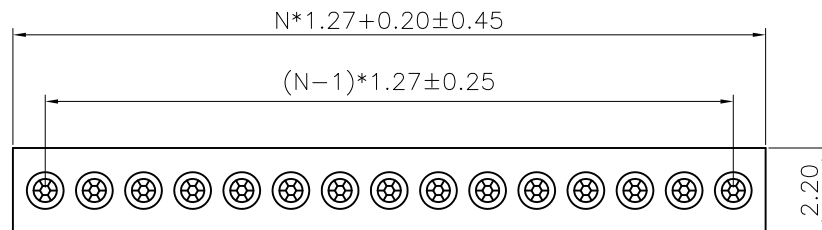

P.C.B LAYOUT

PH	H	XXX	0	9	I	X	XX	0880A	0	00
Angel Options H 贴贴	No. of Positions XXX Positions	Dip Spacing 0 No 1 1.27mm 2 2.54mm 3 7.62mm 4 10.16mm 6 15.24mm 9 22.86mm S Special	Insulator Height 9 4.10mm	Insulator type I PA46单排	Pin Plated 详见编码表	Clip plated 详见编码表	Pin length(mm) 0880A 8.80mm S Special	Insulator Option 0 NO	Series 00 NO	

Technical Data

Material:
 Pin(outer sleeve): Brass,machined CuZn38Pb2
 Plating(outer sleeve):
 Tin plated:2µm/80µ"Ni, 5µm/200µ"Sn
 Gold Plated:2µm/80µ"Ni, Full gold
 Insulator(black): Black (PA46) UL94V-0

Electrical:

Current rating: 1Amps/contact max.
 Contact resistance: ≤4mΩ/contact
 Insulation resistance: ≥1000MΩ at V=500V
 Dielectric Withstanding Voltage: 1000V AC Min
 Operating voltage: 60VAC/DC

Mechanical:

Operating temperatures: Gold Plated:-55°C to+125°C
 Tin plated:-40°C to+105°C
 Soldering temperature: +260°C,10s max.

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2012-10-23	Pitch 1.27mm Sip Socket Single Row SMT Pin Length 8.80mm
X.XXX ±0.10	DRAWN :	LSJ	PART NO: PHHXXX09IXXX0880A000
X.XX ±0.20	CHECKED :		DRAWING NO:
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4
X. ±0.50			

4

3

2

1