

4



3

2

1




REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2016-5-26


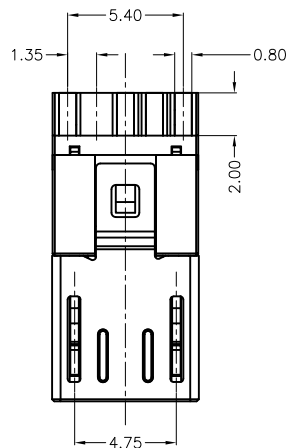


NOTES:

- MATERIAL AND PLATING:**
Housing: High Temp. Thermoplastic, UL94V-0, Black
Contact: Copper Alloy, Au And Sn Plated.
Shell: Stainless Steel
- MECHANICAL CHARACTERISTIC**
Mating Force: 35N(3.5Kgf) max.
Unmating Force: 8N(0.8Kgf) min.
Durability: 10,000 Cycles
- ELECTRICAL CHARACTERISTIC**
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min.
Dielectric Withstanding Voltage: 300V AC Min
- TEMPERATURE**
Opernating Temperature: -40°C~+85°C
Storage Temperature: -40°C~+85°C

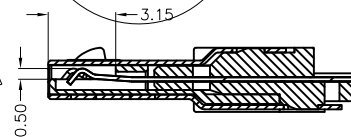

SECTION A-A

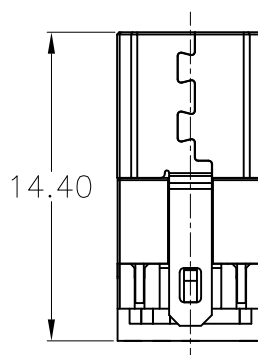

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2016-5-26	USB 公座
X.XXX ±0.10	DRAWN :	ZHANG	PART NO:
X.XX ±0.20	CHECKED :		DRAWING NO:
X.X ±0.30	APPROVED :		REV: A0
X. ±0.50			UNIT: mm
			SCALE: 3:1
			SIZE: A4

4

3

2

1