




REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2012-07-18

Technical Data

Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T + 30%GF

Electrical:
 Current rating: 1.5Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 450V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +260°C, 10s max.

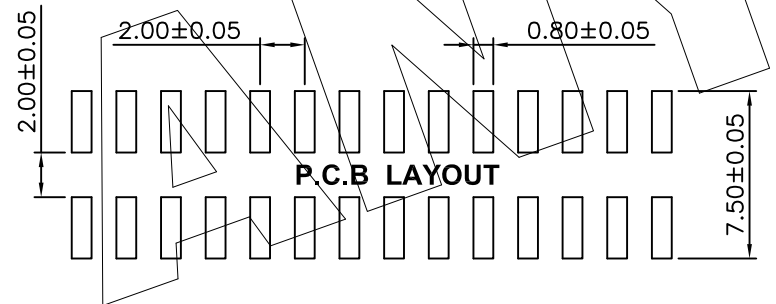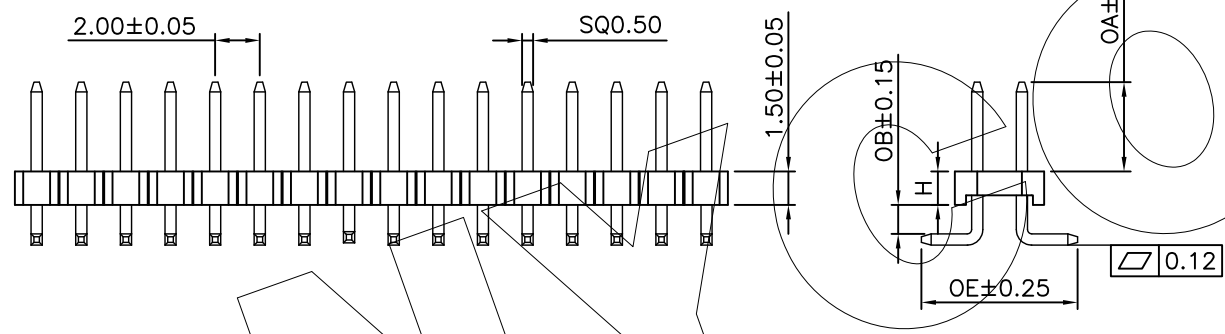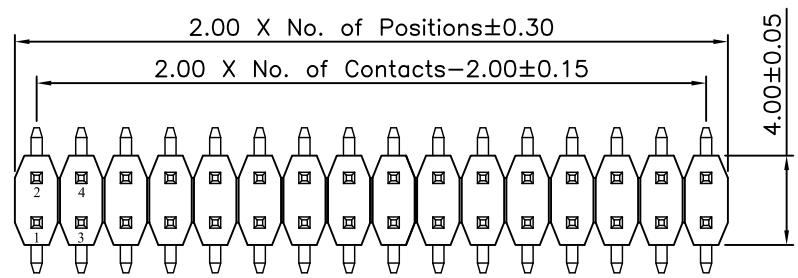

P128	12	XXX	XX	S	X	B	N	SXXX
Product Descriptions P128 H=1.5	Product Type 12 Dual Row	No. of Positions XXX Poles	Pin Plating G0 Gold Flash SN Tin plated	Angle options S SMT	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural		Pin length(mm)

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE: Pitch2.0 H1.5mm Pin Header Dual Row SMT Series
ANGLE ±5°	DATE :	2012-07-18	
X.XXX ±0.10	DRAWN :	Sammo	PART NO: P12812XXXXXXNSXXX
X.XX ±0.20	CHECKED :	james	DRAWING NO:
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4
X. ±0.50			