

4



3

2

1

## REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2012-08-18

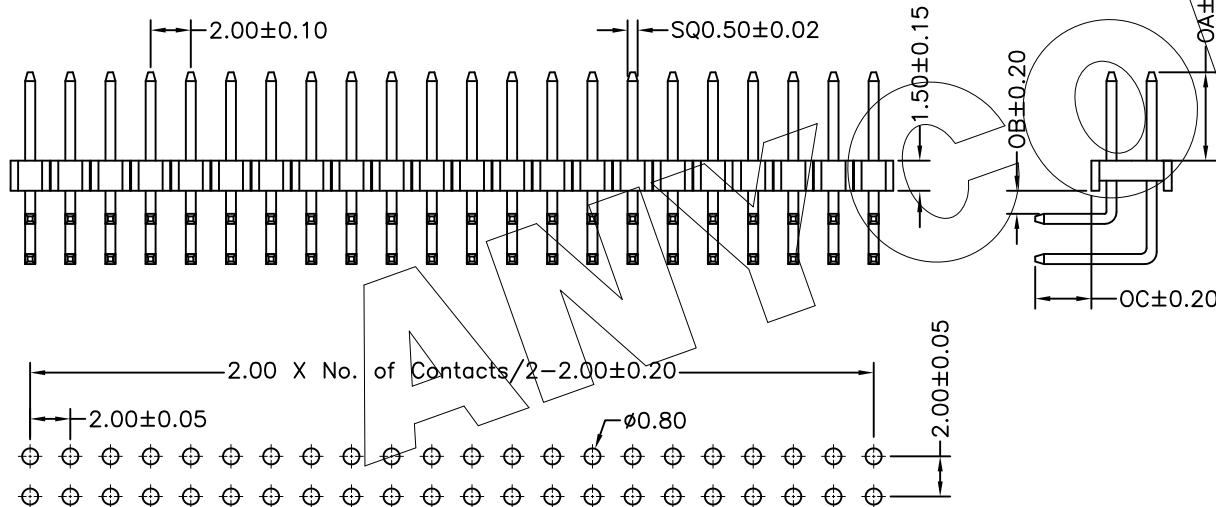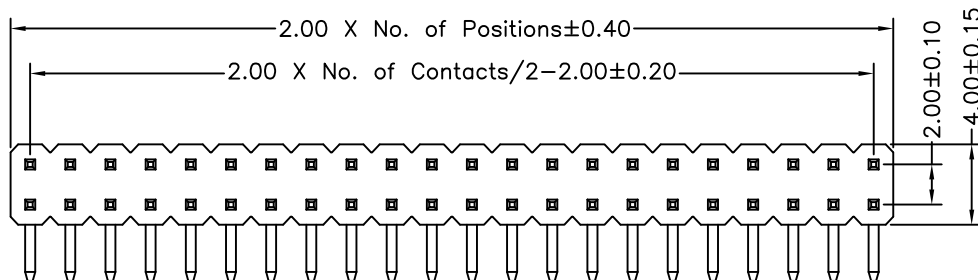

## P.C.B LAYOUT

## Technical Data

Material:

Contact Material: Brass

Contact plating: Selective gold 10u" &amp; tin Over 50μ" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PA6T +30%GF

Electrical:

Current rating: 2.0Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage: 500V AC/minute

Mechanical:

Mechanical life cycle: min.200

Operating temperatures: Gold Plated: -55°C to +105°C

Tin plated: -40°C to +105°C

Soldering temperature: +260°C max

Paking: PE Bag

P128

12

XXX

XX

R

X

X

N

RXXX

Product Descriptions  
P128 H=1.5Product Type  
12 Dual RowNo. of Positions  
XXX PolesPin Plating  
G0 Gold Flash  
G1 1u" Au  
SN Tin Plated  
S1 半金锡1u"  
S2 半金锡2u"  
S6 半金锡10u"Angle options  
R Right AngleInsulator Material  
A PBT  
B PA66  
C PA6T  
D LCPColor  
B Black  
W White  
L Blue  
G Green  
Y Yellow  
R Red  
N NaturalPin length(mm)  
L=10.85/14.85 mm

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2012-08-18	PH2.0mm Pin Header H1.5 Dual Row Straight W=4.0mm
X.XXX ±0.10	DRAWN :	Zhang	PART NO: P12812XXXXXXNRXXX
X.XX ±0.20	CHECKED :		DRAWING NO:
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4
X. ±0.50			

4

3

2

1